

Surface Mount RF Schottky Barrier Diodes

Technical Data


HSMS-28XX Series

Features

- Surface Mount SOT-23/SOT-143 Package
- Low Turn-On Voltage (As Low as 0.34 V at 1 mA)
- Low FIT (Failure in Time) Rate*
- Six-sigma Quality Level
- Single, Dual and Quad Versions
- Tape and Reel Options Available

* For more information see the Surface Mount Schottky Reliability Data Sheet.

Package Lead Code Identification

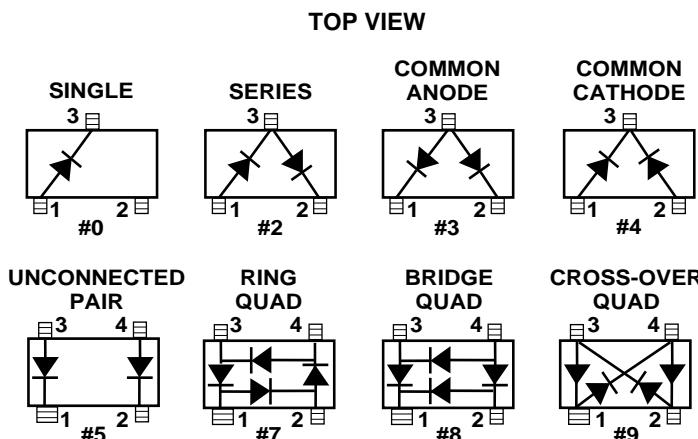

Description/Applications

These Schottky diodes are specifically designed for both analog and digital applications. This series offers a wide range of specifications and package configurations to give the designer wide flexibility. Typical applications of these Schottky

HSMS-2820 series of diodes is the best all-around choice for most applications, featuring low series resistance, low forward voltage at all current levels and good RF characteristics. The HSMS-2860 series is a high performance diode offering superior V_{Fwd} .

**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70**



Electrical Specifications $T_A = 25^\circ\text{C}$, Single Diode^[4]

| Part Number HSMS ^[5] | Package Marking Code ^[3] | Lead Code | Configuration | Nearest Equivalent Axial Lead Part No. 5082- | Minimum Break-down Voltage V_{BR} (V) | Maximum Forward Voltage V_F (mV) | Maximum Forward Voltage V_F (V) @ I_F (mA) | Maximum Reverse Leakage I_R (nA) @ V_R (V) | Maximum Capacitance C_T (pF) | Typical Dynamic Resistance R_D (Ω) ^[6] |
|---------------------------------|-------------------------------------|-----------|----------------------------|--|---|------------------------------------|--|--|--------------------------------|--|
| 2800 | A0 | 0 | Single | 2800 (1N5711) | 70 | 400 | 1.0 15 | 200 50 | 2.0 | 35 |
| 2802 | A2 | 2 | Series | | | | | | | |
| 2803 | A3 | 3 | Common Anode | | | | | | | |
| 2804 | A4 | 4 | Common Cathode | | | | | | | |
| 2805 | A5 | 5 | Unconnected Pair | | | | | | | |
| 2807 | A7 | 7 | Ring Quad ^[6] | | | | | | | |
| 2808 | A8 | 8 | Bridge Quad ^[6] | | | | | | | |
| 2810 | B0 | 0 | Single | 2810 (1N5712) | 20 | 400 | 1.0 35 | 200 15 | 1.2 | 15 |
| 2812 | B2 | 2 | Series | | | | | | | |
| 2813 | B3 | 3 | Common Anode | | | | | | | |
| 2814 | B4 | 4 | Common Cathode | | | | | | | |
| 2815 | B5 | 5 | Unconnected Pair | | | | | | | |
| 2817 | B7 | 7 | Ring Quad ^[6] | | | | | | | |
| 2818 | B8 | 8 | Bridge Quad ^[6] | | | | | | | |
| 2820 | C0 | 0 | Single | 2835 | 15* | 340 | 0.7 30 | 100 1 | 1.0 | 12 |
| 2822 | C2 | 2 | Series | | | | | | | |
| 2823 | C3 | 3 | Common Anode | | | | | | | |
| 2824 | C4 | 4 | Common Cathode | | | | | | | |
| 2825 | C5 | 5 | Unconnected Pair | | | | | | | |
| 2827 | C7 | 7 | Ring Quad ^[6] | | | | | | | |
| 2828 | C8 | 8 | Bridge Quad ^[6] | | | | | | | |
| 2829 | C9 | 9 | Cross-over Quad | | | | | | | |
| 2860 | T0 | 0 | Single | | | | | | | |
| 2862 | T1 | 2 | Series Pair | | | | | | | |
| 2863 | T3 | 3 | Common Anode | | | | | | | |
| 2864 | T4 | 4 | Common Cathode | | | | | | | |
| 2865 | T5 | 5 | Unconnected Pair | | | | | | | |

Test Conditions

$I_F = 10 \mu\text{A}$ $I_R =$ $V_R = 0 \text{ V}$ $I_C = 5 \text{ mA}$

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP: 689 45 44 70

Absolute Maximum Ratings^[1] T_A = 25°C

| Symbol | Parameter | Value |
|------------------|------------------------------|-------------------------|
| I _f | Forward Current (1 ms Pulse) | 1 Amp |
| P _t | Total Device Dissipation | 250 mW ^[2] |
| P _{IV} | Peak Inverse Voltage | Same as V _{BR} |
| T _j | Junction Temperature | 150°C |
| T _{stg} | Storage Temperature | -65 to 150°C |

Notes:


1. Operation in excess of any one of these conditions may result in permanent damage to this device.
2. CW Power Dissipation at T_{LEAD} = 25°C. Derate to zero at maximum rated temperature.

Quad Capacitance

Capacitance of Schottky diode quads is measured using an HP4271 LCR meter. This instrument effectively isolates individual diode branches from the others, allowing accurate capacitance measurement of each branch or each diode. The conditions are: 20 mV R.M.S. voltage at 1 MHz. HP defines this measurement as "CM", and it is equivalent to the capacitance of the diode by itself. The equivalent diagonal and adjacent capacitances can then be calculated by the formulas given below.

In a quad, the diagonal capacitance is the capacitance between points A and B as shown in the figure below. The diagonal capacitance is calculated using the following formula

$$C_{DIAGONAL} = \frac{C_1 \times C_2}{C_1 + C_2} + \frac{C_3 \times C_4}{C_3 + C_4}$$

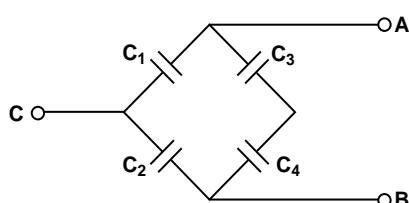

The equivalent adjacent capacitance is the capacitance between points A and C in the figure below. This capacitance is calculated using the following formula

$$C_{ADJACENT} = C_1 + \frac{1}{\frac{1}{C_2} + \frac{1}{C_3} + \frac{1}{C_4}}$$

This information does not apply to cross-over quad diodes.

SPICE Parameters

| Parameter | Units | HSMS-280X | HSMS-281X | HSMS-282X | HSMS-286X |
|-------------------|-------|-----------|-----------|-----------|-----------|
| B _V | V | 75 | 25 | 15 | 7.0 |
| C _{J0} | pF | 1.6 | 1.1 | 0.7 | 0.18 |
| E _G | eV | 0.69 | 0.69 | 0.69 | 0.69 |
| I _{...} | A | 10E-5 | 10E-5 | 10E-4 | 10E-5 |

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP: 689 45 44 70

Typical Parameters at $T_A = 25^\circ\text{C}$ (unless otherwise noted), Single Diode

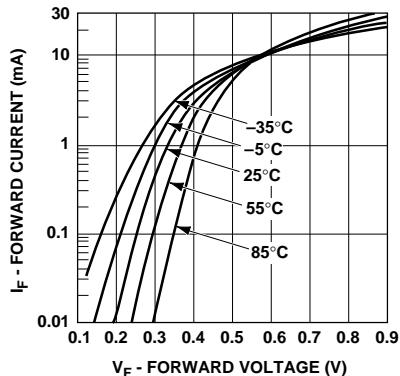


Figure 1. Typical Forward Current vs. Forward Voltage at Temperatures—HSMS-2800 Series

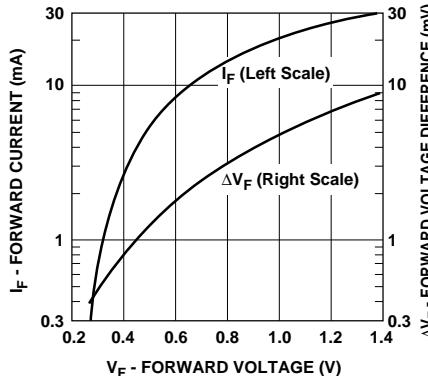


Figure 2. Typical V_f Match, HSMS-2800 Series Pairs and Quads.

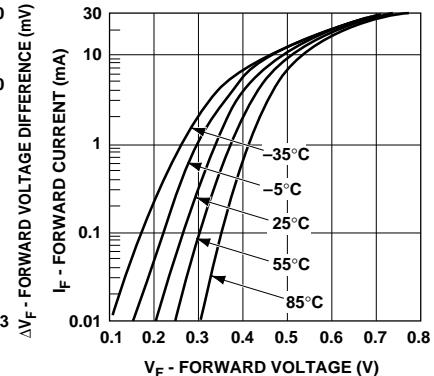


Figure 3. Typical Forward Current vs. Forward Voltage at Temperatures—HSMS-2810 Series.

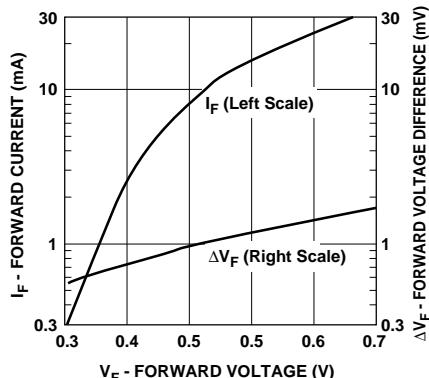


Figure 4. Typical V_f Match, HSMS-2810 Series Pairs and Quads.

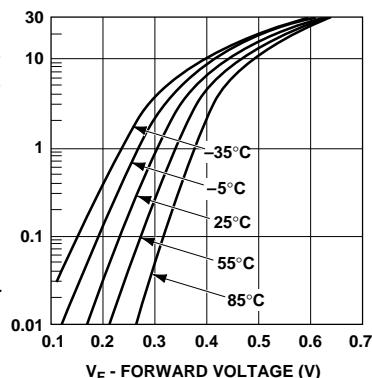


Figure 5. Typical Forward Current vs. Forward Voltage At Temperatures—HSMS-2820 Series.


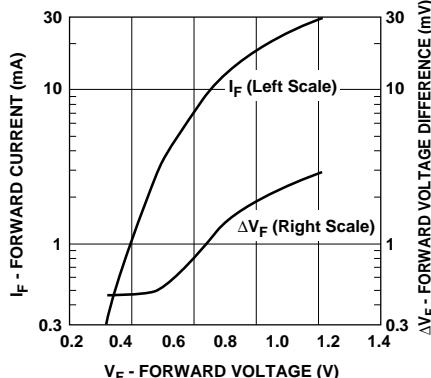


Figure 6. Typical V_f Match, HSMS-2820 Series Pairs and Quads at Mixer Bias Levels.

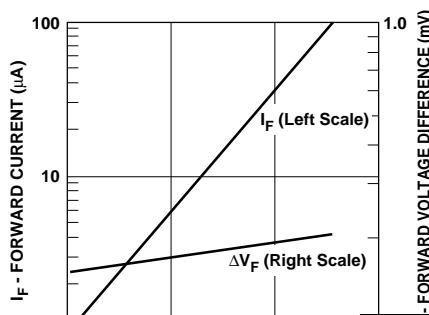

**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP: 689 45 44 70**

Typical Parameters, continued

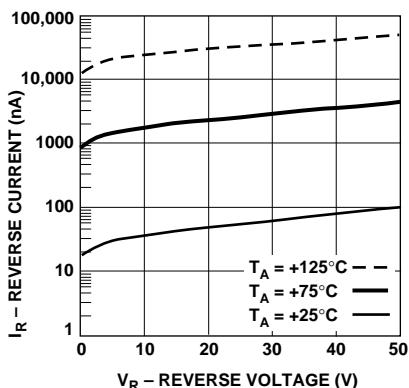


Figure 10. Reverse Current vs.
Reverse Voltage at Temperatures—
HSMS-2800 Series.

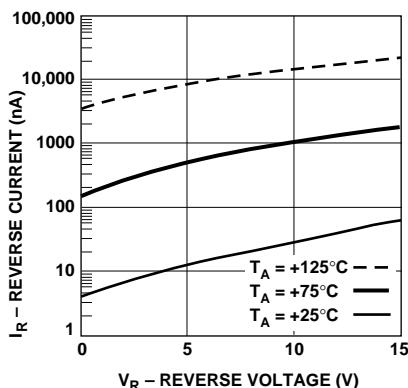


Figure 11. Reverse Current vs.
Reverse Voltage at Temperatures—
HSMS-2810 Series.

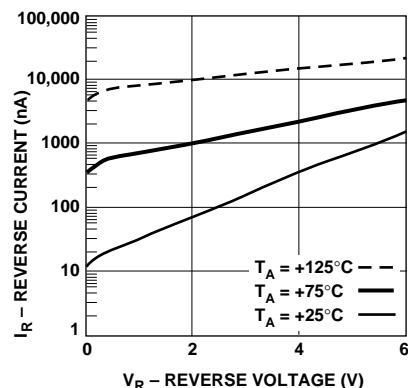


Figure 12. Reverse Current vs.
Reverse Voltage at Temperatures—
HSMS-2820 Series.

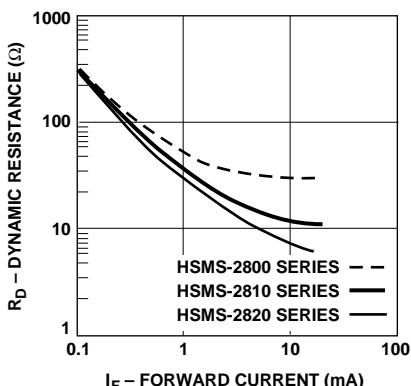


Figure 13. Dynamic Resistance vs.
Forward Current—HSMS-2800 Series.

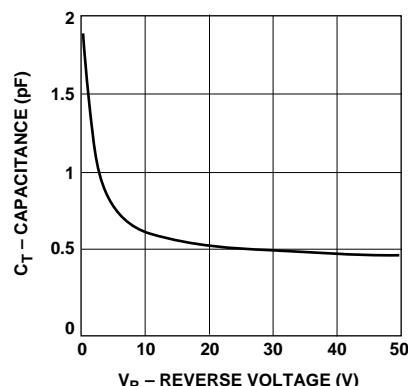


Figure 14. Total Capacitance vs.
Reverse Voltage—HSMS-2800 Series.


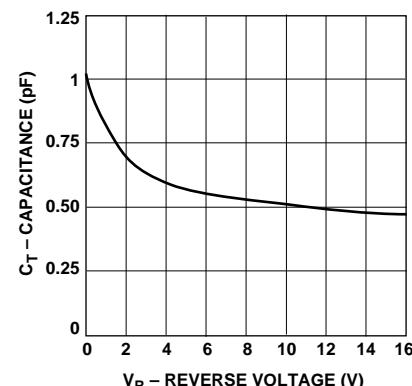


Figure 15. Total Capacitance vs.
Reverse Voltage—HSMS-2810 Series.

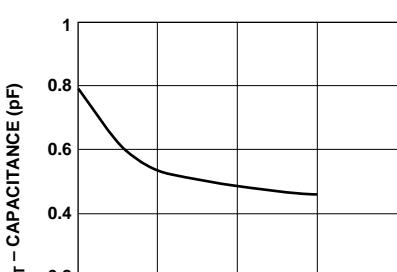

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP: 689 45 44 70

See the HSMS-280A series data sheet.




Package Characteristics


Lead Material Alloy 42
 Lead Finish Tin-Lead 85/15%
 Max. Soldering Temperature ... 260°C for 5 sec
 Min. Lead Strength 2 pounds pull
 Typical Package
 Inductance 2 nH (opposite leads)
 Typical Package
 Capacitance 0.08 pF (opposite leads)

Package Dimensions

Outline 23 (SOT-23)

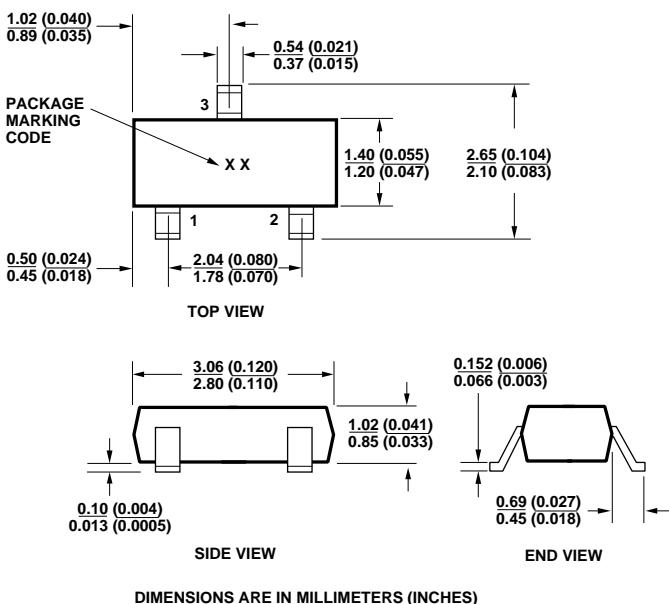

Outline 143 (SOT-143)

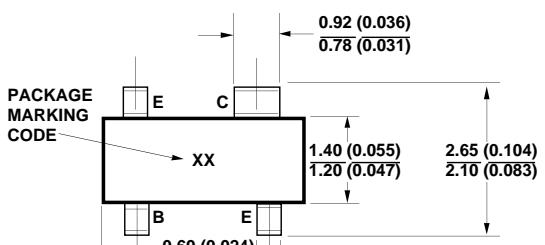

Device Orientation

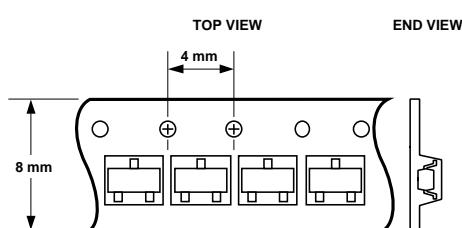
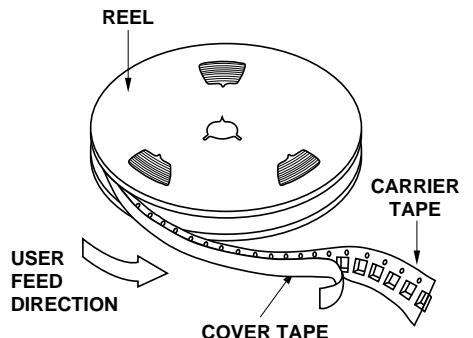


Figure 17 Option L31 for SOT-23 Packages.

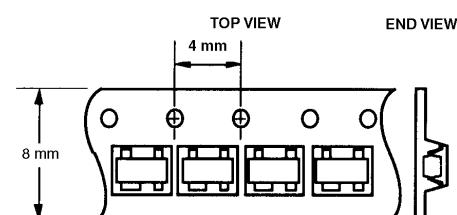


Figure 18. Option L31 for SOT-143 Packages.

www.hp.com/go/rf

For technical assistance or the location of your nearest Hewlett-Packard sales office, distributor or representative call:

**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE
LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS
CALL OR WHATSAPP:689 45 44 70**

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Obsolete 5965-8839E, 5966-0947E
Printed in U.S.A. 5966-4285E (3/98)