RSC
Part I: Introduction



Redes y Servicios de Comunicaciones
Universidad Carlos III de Madrid

These slides are, mainly, part of the companion slides to the book "Computer Networking: A Top Down Approach" generously made available by their authors (see copyright below). The slides have been adapted, where required, to the teaching needs of the subject above.

Computer Networking: A Top Down Approach 5th edition.
Jim Kurose, Keith Ross
Addison-Wesley, April 2009.

RSC Part I: Introduction

- Circuit switching vs packet switching
- Protocols and protocols stacks
- What is the Internet
- Network structure
- ISPs and Internet

The Network Core

- mesh of interconnected routers
- *the* fundamental question: how is data transferred through net?
  - circuit switching: dedicated circuit per call: telephone net
  - packet-switching: data sent through net in discrete "chunks"

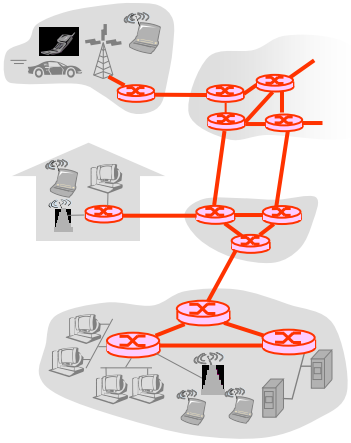

Network Core: Circuit Switching

End-end resources reserved for "call"

- link bandwidth, switch capacity
- dedicated resources: no sharing
- circuit-like

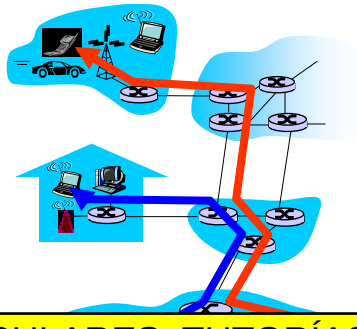

Network Core: Circuit Switching

network resources (e.g., bandwidth) divided into "pieces"

- pieces allocated to calls
- resource piece *idle* if not used by owning call *(no sharing)*

- dividing link bandwidth into "pieces"
  - frequency division
  - time division

Circuit Switching: FDM and TDM

FDM

Example:

4 users

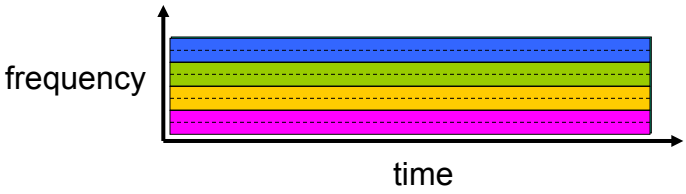

TDM

Network Core: Packet Switching

each end-end data stream divided into *packets*

- user A, B packets *share* network resources
- each packet uses full link bandwidth
- resources used *as needed*

Bandwidth division into "pieces"
Dedicated allocation
Resource reservation

resource contention:

- aggregate resource demand can exceed amount available
- congestion: packets queue, wait for link use
- store and forward: packets move one hop at a time
  - Node receives complete packet before forwarding

Packet Switching: Statistical Multiplexing

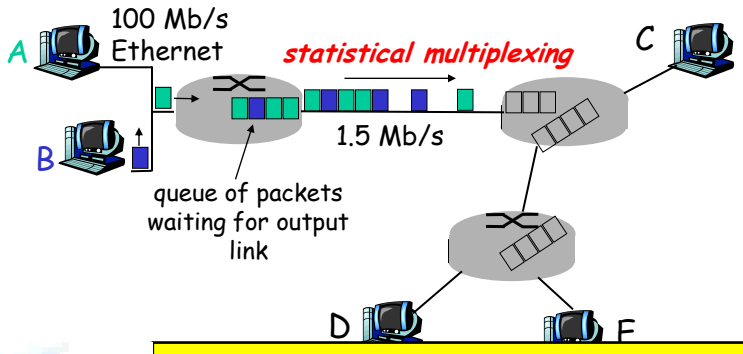

Packet-switching: store-and-forward



- takes L/R seconds to transmit (push out) packet of L bits on to link at R bps
- *store and forward:* entire packet must arrive at router before it can be transmitted on next link
- delay = 3L/R (assuming zero propagation delay)

Example:

- L = 7.5 Mbits
- R = 1.5 Mbps
- transmission delay = 15 sec

} more complex than this …

Packet switching versus circuit switching

Packet switching allows more users to use network!

- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time
- *circuit-switching:*
  - 10 users

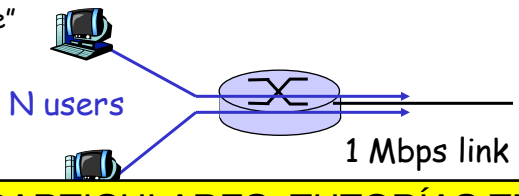

Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"

- great for bursty data
  - resource sharing
  - simpler, no call setup
- excessive congestion: packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- Q: How to provide circuit-like behavior?
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem

What's a protocol?

human protocols:

- "what's the time?"
- "I have a question"
- introductions

… specific msgs sent

… specific actions taken when msgs received

network protocols:

- machines rather than humans
- all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and

Protocol "Layers"

Networks are complex!

- many "pieces":
  - hosts
  - routers
  - links of various media
  - applications
  - protocols
  - hardware, software

Question:

Is there any hope of *organizing* structure of network?

Or at least our discussion of networks?

Why layering?

Dealing with complex systems:

- explicit structure allows identification, relationship of complex system's pieces
  - layered reference model for discussion
- modularization eases maintenance, updating of system
  - change of implementation of layer's service transparent to rest of system

Internet protocol stack

- application: supporting network applications
  - FTP, SMTP, HTTP
- transport: process-process data transfer
  - TCP, UDP
- network: routing of datagrams from source to destination
  - IP, routing protocols
- link: data transfer between neighboring network elements
  - PPP, Ethernet
- physical: bits "on the wire"

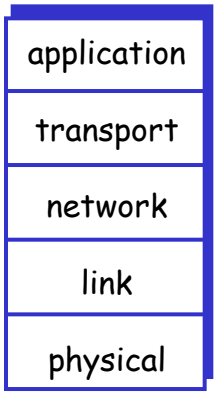

ISO/OSI reference model

- presentation: allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- *session:* synchronization, checkpointing, recovery of data exchange
- Internet stack "missing" these