


# RSC

## Part II: Network Layer

### 4. IPv4 in operation



**Redes y Servicios de Comunicaciones**  
**Universidad Carlos III de Madrid**

These slides are, mainly, part of the companion slides to the book "Computer Networking: A Top Down Approach" generously made available by their authors (see copyright below). The slides have been adapted, where required, to the teaching needs of the subject above.

All material copyright 1996-2009  
J.F Kurose and K.W. Ross, All Rights Reserved

*Computer Networking:  
A Top Down Approach  
5<sup>th</sup> edition.*  
Jim Kurose, Keith Ross  
Addison-Wesley, April  
2009.

Network Layer II-1

## RSC Part II: Network Layer

- II. 1 Basic Network layer concepts
- II.2 Introduction to IPv4
- II.3 IPv4 addressing
- **II.4 IPv4 in operation**
  - ARP
- II.5 IPv6
- II.6 Network routing
  - Link state
  - Distance Vector
  - Hierarchical routing
- II.7 Routing in the Internet
  - RIP

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

---

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

Cartagena99


## MAC Addresses and ARP

- 32-bit IPv4 address:
  - network-layer address
  - used to get datagram to destination IP subnet
- MAC (or LAN or physical or Ethernet) address:
  - function: *get frame from one interface to another physically-connected interface (same network)*
  - 48 bit MAC address (for most LANs)
    - burned in NIC ROM, also sometimes software settable

Network Layer II-3

## LAN Addresses and ARP

Each adapter on LAN has unique LAN address

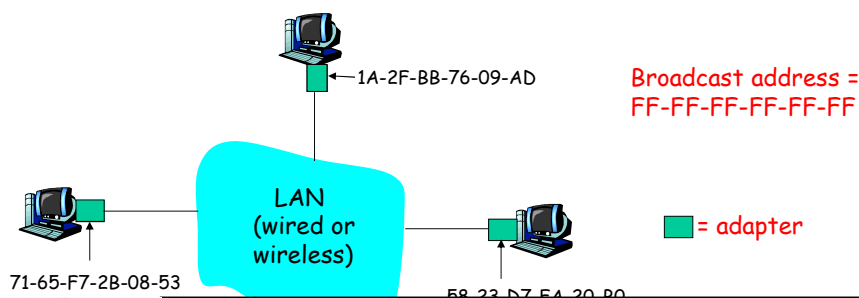

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

---

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

Cartagena99


## LAN Address (more)

- ❑ MAC address allocation administered by IEEE
- ❑ manufacturer buys portion of MAC address space (to assure uniqueness)
- ❑ analogy:
  - (a) MAC address: like Social Security Number
  - (b) IP address: like postal address
- ❑ MAC flat address → portability
  - can move LAN card from one LAN to another
- ❑ IP hierarchical address NOT portable
  - address depends on IP subnet to which node is attached

Network Layer II-5

## ARP: Address Resolution Protocol

**Question:** how to determine MAC address of B knowing B's IPv4 address?

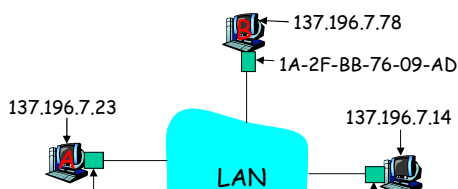

- ❑ Each IPv4 node (host, router) on LAN has **ARP** table
- ❑ ARP table: IPv4/MAC address mappings for some LAN nodes
  - < IPv4 address; MAC address; TTL >
  - TTL (Time To Live): time after which address mapping

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70

---

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

Cartagena99

## ARP protocol: Same LAN (network)

- A: 193.196.7.23;  
B: 193.196.7.78;  
Subnet: 193.196.7.0
- A wants to send a datagram to B, B is in the same IP sub-network as A (as learned in A's routing table), and B's MAC address not in A's ARP table.
- A **broadcasts** ARP query packet, containing B's IP address
  - dest MAC address = FF-FF-FF-FF-FF-FF
  - all machines on LAN receive ARP query
- B receives ARP packet, replies to A with its (B's) MAC address
  - frame sent to A's MAC address (unicast)
- A caches (saves) IP-to-MAC address pair in its ARP table until information becomes old (times out)
  - soft state: information that times out (goes away) unless refreshed
- ARP is "plug-and-play":
  - nodes create their ARP tables without intervention from net administrator


Forwarding table in A:

Network	Mask	Gateway	Interface
193.196.7.0	255.255.255.0		193.196.7.23

Network Layer II-7

## Addressing: routing to another LAN

walkthrough: **send datagram from A to B via R**  
assume A knows B's IPv4 address

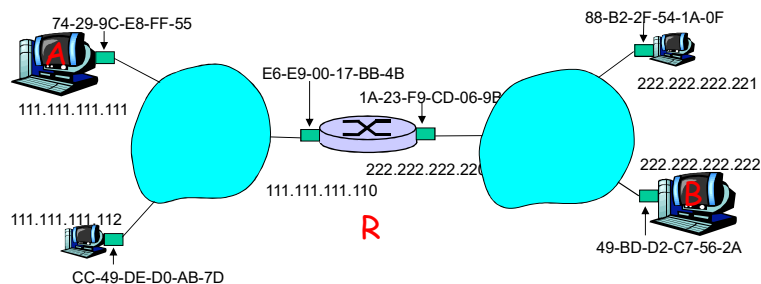

CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE  
LLAMA O ENVÍA WHATSAPP: 689 45 44 70


---

ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS  
CALL OR WHATSAPP:689 45 44 70

Cartagena99

- A creates IPv4 datagram with source A, destination B
- A uses ARP to get R's MAC address for 111.111.111.110
- A creates link-layer frame with R's MAC address as dest, frame contains A-to-B IPv4 datagram
- A's NIC sends frame
- R's NIC receives frame
- R removes IPv4 datagram from Ethernet frame, sees its destined to B
- R uses ARP to get B's MAC address
- R creates frame containing A-to-B IPv4 datagram sends to B

This is a really important example - make sure you understand!

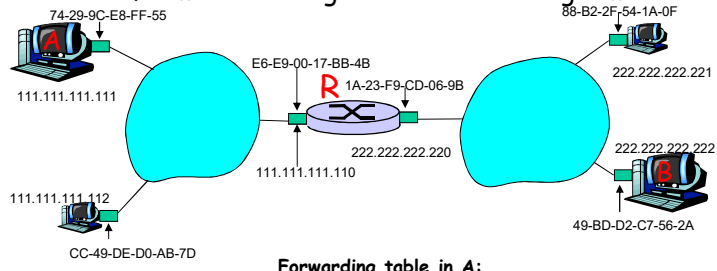

**Forwarding table in A:**

<u>Network</u>	<u>Mask</u>	<u>Gateway</u>	<u>Interface</u>
111.111.111.0	255.255.255.0		111.111.111.111
0.0.0.0	0.0.0.0	111.111.111.110	111.111.111.111

Network Layer II-9



**CLASES PARTICULARES, TUTORÍAS TÉCNICAS ONLINE**  
**LLAMA O ENVÍA WHATSAPP: 689 45 44 70**

- - -

**ONLINE PRIVATE LESSONS FOR SCIENCE STUDENTS**  
**CALL OR WHATSAPP:689 45 44 70**